


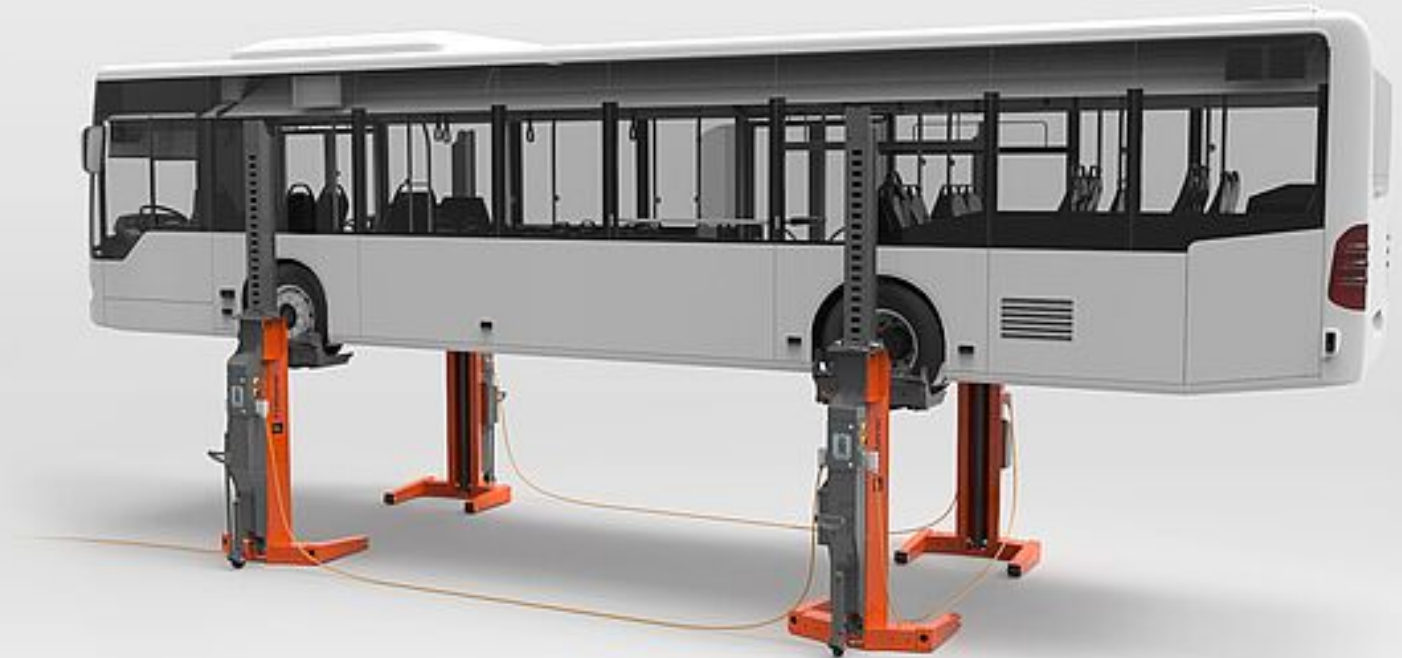

Mobile column

EHB907V11AC Cabled

article no.: EHB907V11AC01-M/S

Mobile columns EHB90XV11AC with a capacity of 7.5 t each cover a variety of different commercial vehicles, e.g. buses and trucks (wheel diameter 550 - 1140 mm). The columns are powered by a supply unit that is connected to the mains. They have a low-maintenance hydraulic drive and communicate via radio. Operation is possible via a clear LCD display on each column. Up to 10 columns can be combined into one lifting system or divided into several smaller systems if required. Examples of the configuration of a lifting system:

- Set of 4: 1 x EHB907V11AC01-M plus 3 x EHB907V11AC01-S
- Set of 6: 1 x EHB907V11AC01-M plus 5 x EHB907V11AC01-S
- Set of 8: 1 x EHB907V11AC01-M plus 7 x EHB907V11AC01-S



specifications


article no.		EHB907V11AC01-M/S
lifting unit	type of columns	all columns identical
	quantity of columns	1
	quantity of columns, maximum	10
load support	load support	adjustable wheel fork
	capacity per column	7.5 t
	wheel size Ø minimum (mm)	550 mm
	wheel size Ø maximum (mm)	1140 mm
	length of fork (mm)	385 mm
height	lifting stroke effective	1750 mm
	lifting height	1850 mm
	frame height at front (mm)	100 mm
speed	lifting time	90 sec.
	lowering time (under load)	90 sec.
drive	mode of drive	electro-hydraulic
	motor	Three phase alternating current
	motor power per column (kW)	2.2 KW
power supply	electrical connection per column	400V/3Ph+N+PE/50Hz
communication		communication via radio, wireless
operation	mode of operation	operation at each column
	activation	all, individual, pair
	control	electronic
	Softstart	yes
regularisation	synchronisation	proportional valves, infinitely variable
travelling device	travelling device	at each column
	travelling device at front	2 front wheels, fixed
	travelling device at rear	1 wheel handle, spring-loaded, self-lowering under load
	ground clearance at front	15 mm
	ground clearance at rear	35 mm
load securing	load securing	hydraulic and mechanical
dimensions	length	1200 mm
	width	1165 mm
	height	2255 mm
	height of fork (mm)	100 mm
weight	weight per column (kgs)	540 kg
protection class		IP54
surface treatment	type of surface treatment	powder coating
	colour	orange RAL2004 / grey RAL7015




accessories



EHB907TDH
hydraulic pallet jack



EHB907TDA
front wheels height adjustable



EHB907FLP
Forklift pockets



EHB907-LS-PR503-385
Load support, pluggable



EHB907TRT412TR01-38
5
Basic cross beam 880 mm,
tractor support at front



EHB907TRT412TR02-38
5
Basic cross beam 640 mm
tractor support at rear




EHB907TR17
Truck crossbeam, 17 t, length
3000 mm



MS08LR
support stand, 8.2 t, 790-1270
mm



HS08LR
support stand, 8.2 t, 1260-1990
mm



EHB907SPOT02
2 LED spots